

PRODUCT DATA SHEET MEDIUM & HIGH PROFILE BEACONS



Features:


- Certified Performance – Complies with ECE R10 (EMC), SAE J845 Class 1, and CISPR 25 Class 3 standards, ensuring virtually no RFI/EMI interference.
- Rugged Construction & Durable Design
- Customisable Flash Patterns

Description:

The BE350 and BE375 LED beacon series are engineered to deliver bright Class 1 amber illumination with optimized flash intensity and selectable flash rates that clearly signal caution or alert status. Providing powerful 360° visibility, these beacons operate on 10–30V systems, are fully sealed to IP67 standards, and feature 11 selectable flash patterns. Ideal for tow trucks, construction vehicles, warehouse forklifts, and other service or industrial applications, the BE350 and BE375 offer dependable performance in demanding environments.

Parts List

BE350-ST	Medium Profile Stud Mount Beacon
BE350-MG	Medium Profile Magnetic Mount Beacon
BE375-ST	High Profile Stud Mount Beacon
BE375-MG	High Profile Magnetic Mount Beacon

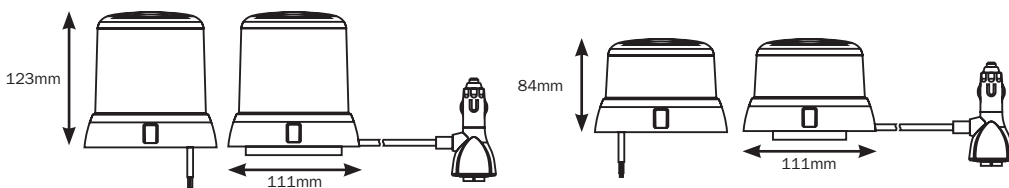

Specifications:

Voltage:	10-30V
Power:	2A @12V or 1A @24V
Lens:	Polycarbonate
Housing:	Aluminium
Mounting:	Surface or Magnetic
Environmental:	IP67 Fully Sealed
Compliance:	ECE R10 CSIPR 25 CLASS 3 ECE R65 CLASS 1 SAE J845 CLASS 1

Flash Patterns:

1	Single Flash	125 Flash Per Min
2	Single Flash	75 Flash Per Min
3	Double Flash	125 Flash Per Min
4	Triple Flash	125 Flash Per Min
5	Quadruple	125 Flash Per Min
6	Quintuple	125 Flash Per Min
7	Rotating	
8	Single + Triple Combo	
9	Single + Quintuple Combo	
10	Strobe	600 Flash Per Min
11	Cruise	30% Brightness